


DC High Speed Slim Chuck System VERTEX®




DC Collet System

- Back pulling lock design.
- High clamping force.
- Rigid & high stability.
- For high precision cutting.
- Collets with different sizes can be used on all kind of end mills, reamers, drills and tapping.
- Runout: below 0.005mm.
- Smallest outer diameter.
- Max speed :30.000rpm;G2.5.

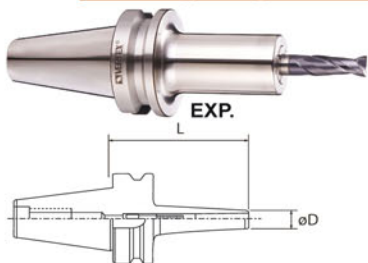

ORDER NO.	COLLET TYPE	L	ØD	CLAMPING RANGE	WRENCH	BACK SCREW	WEIGHT (kg)	CODE NO.
BT40-DC6-60	DC6	60	15	2-6	4mm	M5	1.1	3218-046
BT40-DC6-90	DC6	90	15	2-6			1.2	3218-047
BT40-DC8-90	DC8	90	22	3-8	5mm	M6	1.2	3218-100
BT40-DC8-120	DC8	120	22	3-8			1.4	3218-101
BT40-DC10-90	DC10	90	28	3-10	6mm	M8	1.3	3218-102
BT40-DC10-120	DC10	120	28	3-10			1.5	3218-103
BT40-DC12-90	DC12	90	35	3-12	8mm	M10	1.35	3218-104
BT40-DC12-120	DC12	120	35	3-12			1.6	3218-105

Small Collet Of Slim Collet Chuck



DC Collet System

- DC6 Series : For Clamping End Mills Drills, Reamers And Taps.
- Max. Clamping Diameter
- Runout : Below 0.005 mm

Precision DC Collet within 5 micron

Dimension

TYPE	ØD	L	G
DC6	9.5	36	M5*0.8P
DC8	15	45	M6*1.0P
DC10	19	52	M8-1.25P
DC12	22	60	M10*1.5P

ORDER NO.	øD	L	CLAMPING CAPACITY FOR END MILL DLA.	CLAMPING CAPACITY FOR DRILL REAMER. TAP	WEIGHT(kg)	CODE NO.
DC6-2	9.5	36	2	2.00-1.75	0.02	3218-056
DC6-2.5	9.5	36	2.5	2.50-2.25	0.02	3218-058
DC6-3	9.5	36	3	3.00-2.75	0.02	3218-065
DC6-3.5	9.5	36	3.5	3.50-3.25	0.02	3218-067
DC6-3.175	9.5	36	3.175	3.50-3.175	0.02	3218-068
DC6-4	9.5	36	4	4.00-3.75	0.02	3218-069
DC6-4.5	9.5	36	4.5	4.50-4.25	0.02	3218-071
DC6-5	9.5	36	5	5.00-4.75	0.02	3218-073
DC6-5.5	9.5	36	5.5	5.50-5.25	0.02	3218-075
DC6-6	9.5	36	6	6.00-5.75	0.02	3218-077
DC8-3	15	45	3	3.00-2.75	0.037	3218-120
DC8-3.175	15	45	3.175	3.175-2.92	0.037	3218-121
DC8-4	15	45	4	4.00-3.75	0.036	3218-122
DC8-5	15	45	5	5.00-4.75	0.035	3218-123
DC8-6	15	45	6	6.00-5.75	0.034	3218-124
DC8-7	15	45	8	8.00-7.75	0.03	3218-125
DC10-3	19	52	3	3.00-2.75	0.074	3218-140
DC10-4	19	52	4	4.00-3.75	0.074	3218-141
DC10-5	19	52	5	5.00-4.75	0.074	3218-142
DC10-6	19	52	6	6.00-5.75	0.072	3218-143
DC10-8	19	52	8	8.00-7.75	0.068	3218-144
DC10-10	19	52	10	10.00-9.75	0.062	3218-145
DC12-3	22	60	3	3.00-2.75	0.11	3218-160
DC12-4	22	60	4	4.00-3.75	0.11	3218-161
DC12-5	22	60	5	5.00-4.75	0.108	3218-162
DC12-6	22	60	6	6.00-5.75	0.108	3218-163
DC12-8	22	60	8	8.00-7.75	0.104	3218-164
DC12-10	22	60	10	10.00-9.75	0.096	3218-165
DC12-12	22	60	12	12.00-11.75	0.084	3218-166

DC SLIM CHUCK