


## MILLING

### CUTTERS APKT

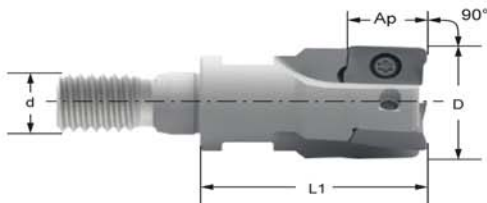

#### SCREW COUPLING - APKT 060204 PDTR\*\* / APKT 0602-HF\*\* / APKW 0602-HF\*\*

DESIGNATION	D	D1 HF	d	L1	Ap HF	Ap 90°	Z	α HF	α 90°	CATALOG #
LT 752 S-W-D010/2*	10	4.7	M6	19	0.5	5.2	2	3.25	3.0	M2003087
LT 752 S-W-D012/3*	12	6.7	M6	19	0.5	5.2	3	2.5	2.2	M2003088
LT 752 S-W-D016/4*	16	10.7	M8	22	0.5	5.2	4	2.0	1.5	M2003089
LT 752 S-W-D020/5*	20	14.7	M10	25	0.5	5.2	5	1.25	1.15	M2003090
LT 752 S-W-D025/7*	25	19.7	M12	25	0.5	5.2	7	1.0	0.9	M2003091
LT 752 S-W-D032/8*	32	26.7	M16	30	0.5	5.2	8	0.7	0.7	M2003094

\*Available Q3 2017

SCREW	M2001640
SCREW DRIVER HANDLE	M2002922
PRESET ADAPTER 0.4NM	M2002923
TORX PLUS BIT	M2003064

#### SCREW COUPLING - APKT 100308 PDTR / 100304 PDTR / 100312 PDTR / 100316 PDTR

DESIGNATION	D	d	L1	Ap	Z	α	CATALOG #
LT 741 S-W-D016/2	16	M8	25	9	2	10	M2002962
LT 741 S-W-D020/3	20	M10	30	9	3	7	M2002963
LT 741 S-W-D025/4	25	M12	35	9	4	5	M2002964

SCREW	M2002181
KEY	M2000601

\*\* Due to the small size of these inserts, using a pre-set torque screw driver (0.4Nm) at all times is recommended. It is also recommended that during mounting, the insert should be held in place with a finger.