


MILLING

CUTTERS APKT / APKW

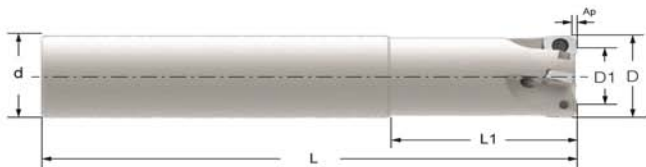

END MILL - APKT 060204** / APKT 0602-HF** / APKW 0602-HF**

DESIGNATION	D	D1 HF	d	L	L1	Ap HF	Ap 90°	Z	α HF	α 90°	CATALOG #
LT 752 C-W-D010/2	10	4.7	10	72	16	0.5	5.2	2	3.25	3.0	M2003098
LT 752 C-W-D012/3	12	6.7	12	80	26	0.5	5.2	3	2.5	2.2	M2003099
LT 752 CL-W-D012/3*	12	6.7	10	120	13.5	0.5	5.2	3	2.5	2.2	M2003078
LT 752 C-W-D016/4	16	10.7	16	90	32	0.5	5.2	4	2.0	1.5	M2003100
LT 752 CL-W-D016/3*	16	10.7	14	160	13.5	0.5	5.2	3	2.0	1.5	M2003105
LT 752 C-W-D020/5	20	14.7	20	100	40	0.5	5.2	5	1.25	1.15	M2003101
LT 752 CL-W-D020/4*	20	14.7	18	200	13.5	0.5	5.2	4	1.25	1.15	M2003080
LT 752 C-W-D025/7	25	19.7	20	120	40	0.5	5.2	7	1.0	0.9	M2003102
LT 752 CL-W-D025/6*	25	19.7	20	220	15	0.5	5.2	6	1.0	0.9	M2003081

* Available Q3 2017

SCREW M2001640
SCREW DRIVER HANDLE M2002922
PRESET ADAPTER 0.4NM M2002923
TORX PLUS BIT M2003064



SCREW COUPLING - APKT 060204** / APKT 0602-HF** / APKW 0602-HF**

DESIGNATION	D	D1 HF	d	L1	Ap HF	Ap 90°	Z	α HF	α 90°	CATALOG #
LT 752 S-W-D010/2*	10	4.7	M6	19	0.5	5.2	2	3.25	3.0	M2003087
LT 752 S-W-D012/3*	12	6.7	M6	19	0.5	5.2	3	2.5	2.2	M2003088
LT 752 S-W-D016/4*	16	10.7	M8	22	0.5	5.2	4	2.0	1.5	M2003089
LT 752 S-W-D020/5*	20	14.7	M10	25	0.5	5.2	5	1.25	1.15	M2003090
LT 752 S-W-D025/7*	25	19.7	M12	25	0.5	5.2	7	1.0	0.9	M2003091
LT 752 S-W-D032/8*	32	26.7	M16	30	0.5	5.2	8	0.7	0.7	M2003094

* Available Q3 2017

SCREW M2001640
SCREW DRIVER HANDLE M2002922
PRESET ADAPTER 0.4NM M2002923
TORX PLUS BIT M2003064

** Due to the small size of these inserts, using a pre-set torque screw driver (0.4Nm) at all times is recommended. It is also recommended that during mounting, the insert should be held in place with a finger.