


# COPA MANDRIL HIDRAULICA DE 3 MORDAZAS 3-780-0600



Technical Details

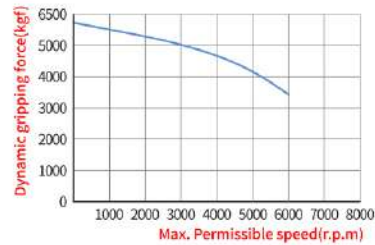

Chuck Size	in	6
Thru Hole J	in(mm)	1.811 (46)
Jaw Stroke	in(mm)	0.217 (5.5)
Plunger Stroke	in(mm)	0.512 (13)
Gripping Dia Max	in(mm)	6.654 (169)
Gripping Dia Min	in(mm)	0.512 (13)
Max Permissible Input Force	lbf(kgf)	5500 (2500)
Max Gripping Force	lbf(kgf)	14137.2 (6426)
Max Speed	RPM	6000
Weight	lb (kg)	30.14 (13.7)
Moment of Inertia	lb*ft <sup>2</sup>	0.0512

**DIAMETRO DE 6" 150MM**  
**MONTAJE PLAIN BACK TYPE B-200**  
**CUERPO EN ACERO, RPM 6000**

A	in(mm)	6.654 (169)
B	in(mm)	3.543 (90)
C	in(mm)	5.512 (140)
F	in(mm)	0.197 (5)
G	in(mm)	4.567 (116)
H	in(mm)	4.126 (104.8)
J	in(mm)	4.126 (104.8)
K		6 x M10
L	in(mm)	0.63 (16)
M	in(mm)	0.787 (20)
N max	in(mm)	1.319 (33.5)
N min	in(mm)	1.209 (30.7)
O max	in(mm)	0.906 (23)
O min	in(mm)	0.394 (10)
P max	in(mm)	1.063 (27)
P min	in(mm)	0.551 (14)
Q	in(mm)	1.22 (31)
R	in(mm)	0.472 (12)
S	in(mm)	0.748 (19)
T	in(mm)	0.079 (2)
U max		M55 x 2.0
V		3 - M6
W	in	2.362 (60)
X	in	0.787 (20)
Y	in	1.299 (33)
Z	in	2.598 (66)

