


# COPA MANDRIL HIDRAULICA DE 3 MORDAZAS 3-780-0800

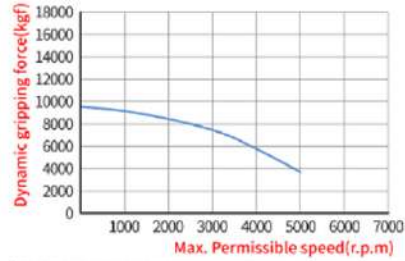

Chuck Dia	in	8
Thru Hole	in(mm)	2.047 (52)
Jaw Stroke	in(mm)	0.299 (7.6)
Plunger Stroke	in(mm)	0.709 (18)
Gripping Dia Max	in(mm)	8.268 (210)
Gripping Dia Min	in(mm)	0.433 (11)
Max Permissible Input Force	lbf(kgf)	8976 (4080)
Max Gripping Force	lbf(kgf)	21113.4 (9597)
Max Speed	RPM	5000
Weight	lb (kg)	51.92 (23.6)
Moment of Inertia	lb+ft <sup>2</sup>	0.1454

**DIAMETRO DE 8" 200MM  
MONTAJE PLAIN BACK TYPE B-200  
CUERPO EN ACERO, RPM 5000**

A	in(mm)	8.268 (210)
B	in(mm)	4.055 (103)
C	in(mm)	6.693 (170)
F	in(mm)	0.197 (5)
G	in(mm)	5.906 (150)
K	in(mm)	6-M12
L	in(mm)	0.709 (18)
M		0.984 (25)
N max	in(mm)	1.642 (41.7)
N min	in(mm)	1.492 (37.9)
O max	in(mm)	1.063 (27)
O min	in(mm)	0.394 (10)
P max	in(mm)	1.319 (33.5)
H	in(mm)	5.252 (133.4)
P min	in(mm)	0.61 (15.5)
J	in(mm)	2.047 (52)
Q	in(mm)	1.535 (39)
R	in(mm)	0.551 (14)
S	in(mm)	0.807 (20.5)
T	in(mm)	0.079 (2)
U max		M60x2.0
V		3-M6
W	in	2.598 (66)
X	in	1.181 (30)
Y	in	1.535 (39)
Z	in	3.386 (86)

