


COPA MANDRIL HIDRAULICA DE 3 MORDAZAS 3-780-1500

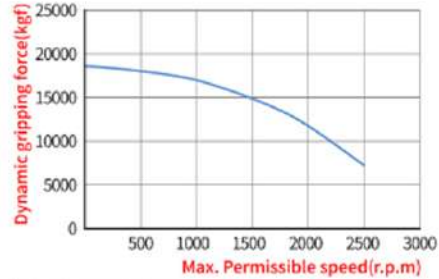

| | | |
|-----------------------------|--------------------|---------------|
| Chuck Dia | in | 15 |
| Thru Hole | in(mm) | 4.646 (118) |
| Jaw Stroke | in(mm) | 0.417 (10.6) |
| Plunger Stroke | in(mm) | 0.906 (23) |
| Gripping Dia Max | in(mm) | 15 (381) |
| Gripping Dia Min | in(mm) | 1.181 (30) |
| Max Permissible Input Force | lbf(kgf) | 15928 (7240) |
| Max Gripping Force | lbf(kgf) | 40381 (18355) |
| Max Speed | RPM | 2500 |
| Weight | lb (kg) | 279.4 (127) |
| Moment of Inertia | lb*ft ² | 1.9539 |

DIAMETRO DE 15" 375MM
MONTAJE PLAIN BACK TYPE B-200
CUERPO EN ACERO, RPM 2500

| | | |
|-------|--------|--------------|
| A | in(mm) | 15 (381) |
| B | in(mm) | 5.866 (149) |
| C | in(mm) | 11.811 (300) |
| F | in(mm) | 0.236 (6) |
| G | in(mm) | 10.236 (260) |
| K | in(mm) | 6-M20 |
| L | in(mm) | 1.102 (28) |
| M | | 1.693 (43) |
| N max | in(mm) | 3.228 (82) |
| N min | in(mm) | 3.02 (76.7) |
| O max | in(mm) | 1.724 (43.8) |
| O min | in(mm) | 0.72 (18.3) |
| P max | in(mm) | 1.299 (33) |
| H | in(mm) | 9.252 (235) |
| P min | in(mm) | 0.394 (10) |
| J | in(mm) | 4.646 (118) |
| Q | in(mm) | 2.441 (62) |
| R | in(mm) | 0.866 (22) |
| S | in(mm) | 1.535 (39) |
| T | in(mm) | 0.197 (5) |
| U max | | M130x2.0 |
| V | | 3-M10 |
| W | in | 5.472 (139) |
| X | in | 2.362 (60) |
| Y | in | 2.756 (70) |
| Z | in | 6.496 (165) |

