


COPA MANDRIL HIDRAULICA DE 3 MORDAZAS 3-780-1000

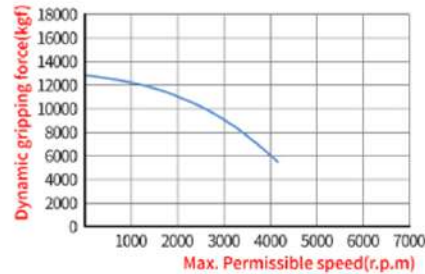

DIAMETRO DE 10" 250MM
MONTAJE PLAIN BACK TYPE B-200
CUERPO EN ACERO, RPM 4200

Chuck Dia	in	10
Thru Hole	in(mm)	3.031 (77)
Jaw Stroke	in(mm)	0.335 (8.5)
Plunger Stroke	in(mm)	0.787 (20)
Gripping Dia Max	in(mm)	10 (254)
Gripping Dia Min	in(mm)	1.22 (31)
Max Permissible Input Force	lbf(kgf)	11220 (5100)
Max Gripping Force	lbf(kgf)	28028 (12740)
Maximum speed	RPM	4200
Weight	lb (kg)	88 (40)
Moment of Inertia	lb*ft ²	0.2642

A	in(mm)	10 (254)
B	in(mm)	4.449 (113)
C	in(mm)	8.661 (220)
F	in(mm)	0.197 (5)
G	in(mm)	7.48 (190)
K	in(mm)	6-M16
L	in(mm)	0.945 (24)
M		1.181 (30)
N max	in(mm)	2.146 (54.5)
N min	in(mm)	1.98 (50.3)
O max	in(mm)	1.22 (31)
O min	in(mm)	0.472 (12)
P max	in(mm)	1.083 (27.5)
H	in(mm)	6.748 (171.4)
H	in(mm)	6.748 (171.4)
J	in(mm)	3.031 (77)
J	in(mm)	3.031 (77)
R	in(mm)	0.63 (16)
S	in(mm)	1.063 (27)
T	in(mm)	0.079 (2)
U max		M85x2.0
V		3-M8
W	in	3.701 (94)
X	in	1.181 (30)
Y	in	1.772 (45)
Z	in	4.252 (108)

